




IP66 550W BSW MOVING HEAD
MH-550_BSW IP

Features

- 1、 Combined Beam, Spot, Wash in one fixture
- 2、 High efficiency 550W gas discharge bubble, long life and strong penetration
- 3、 Colorful and changeable patterns
- 4、 Modular design for easy production, test and maintenance
- 5、 Die-casting metal housing, IP66, waterproof, dustproof, and oil-proof design, suitable for all-weather outdoor environment use.
- 6、 Self-rechargeable buffer battery, edit menu under nopower state Bilingual menu, 180° reversible LCD menu display.
- 7、 Professional thermal system design to ensure best heat dissipation
- 8、 Advanced magnetic encoder technology, X / Y positioning is smooth and accurate
- 9、 Input signal isolation protection for anti signal interference.
- 10、 Software upgrade: DMX

Gobos & Colours

Static Gobo Wheel:



Rotating Gobo Wheel:



Color System:



CMY:



Technical Parameters

Optical System

Light Source: Philips Platinum 25R, 550W
Optical Angle: BEAM mode:2°
SPOT mode: 3°-36°
WASH mode: 4°-34°
CRI: 80

Electrical Specification

Input Voltage: : AC100~240v,50/60Hz
Power: 730W
Power Connector: Waterproof POWERCON
Signal Connector: Waterproof 3-PIN XLR

Control System

Mechanical Movement: Pan 540 °, Tilt 270 ° (8-16bit scanning)
Dimming: Linear 0-100%, 4 dimming curves
Cooling System: Forced convection
Control Protocol: DMX, RDM, W-DMX (wireless optional)
Strobe: Mechanical strobe, max @25Hz , random /pulsed(optional)
Channel Mode: 17CHS, 23CHS, 26CHS
Others: Self-rechargeable buffer battery, edit menu under nopower state, LCD screen.

Working Environment

Working Temperature: 0-40°
IP Rating: Ip66


Dynamic Effects

Rotating Gobo Wheel: 8 interchangeable gobos + open + animation effect
Static Gobo Wheel: 18 gobos + open + animation effect
Color Wheel: 13 dichroic color filters + open, Rainbow effect with bi-directional and variable speeds.
CMYK: CMY mixing system.
Prism: Rotating 8 prism + strip prism, bi-directional rotating at variable speeds, and positioning function.
Focus: Motorized linear focus
Frost: 0 ~ 100%

Physical Specification

Size: 800.8 * 472 *410 mm
Weight: 43kg
Housing: Die-casting metal housing
Color: Black

Photometric Diagram

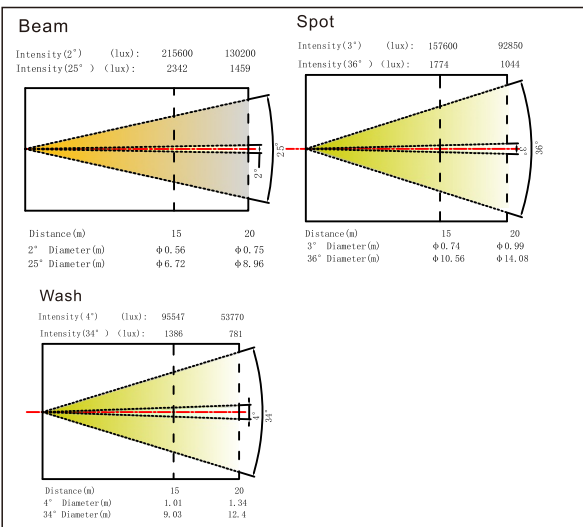

Size

