




PRODUCTS FEATURE

1. High output, High CRI \geq 96.
2. Uniform spot.
3. High consistent CCT.
4. Natural cooling, Mute design.
5. High output, no brightness loss during CCT adjusting.
6. Smooth dimming, four kinds of dimming curves such as: S-Gamma, Linear, L-Gamma, B-Gamma, could be customized.

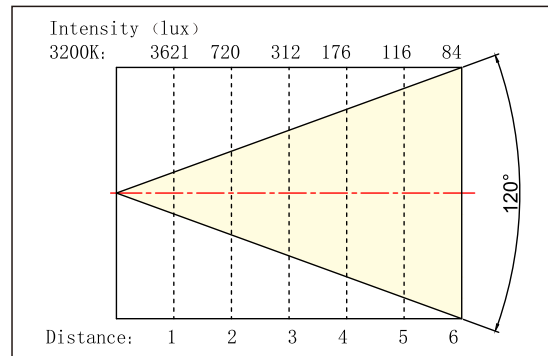

3200K

TECHNICAL PARAMETERS

Electric parameter		Optical parameter		Mechanical and physical parameters	
Input Voltage	AC100~240V	Light Source	0.5W LEDs 512pcs	Housing	Aluminum
Power	100W	Color	Warm&Cold White	IP Rating	IP20
Control Signal	DMX512	CCT	3200K~5600K adjustable	Working Temperature	-20°C~40°C
Control Channel	4CH	CRI	\geq 96	N.W	8.5kg
Signal Connector	3/5PIN optional	Beam Angle	120°	Size	518×510×134mm
Display Window	2.4 inch color LCD display	Illumination Intensity	84Lux@6m(3200K) 95Lux@6m(5600K)	Accessories	Barndoor, Honey Comb(optional), P.O. Yoke(optional)
Output Lumen	6000LM	Dimmer	0~100%		